








AS-Interface module, 2 safe inputs, 1 LED, red, spring-type terminal and insulation displacement system, for front plate mounting

product brand name	SIRIUS ACT
product designation	AS-Interface module
product type designation	3SU1
General technical data	
product function	2F-DI / 1 LED
degree of pollution	3
type of voltage	
• of the operating voltage	DC
• of the input voltage	DC
consumed current maximum	60 mA
protection class IP	IP20
shock resistance for railway applications according to EN 61373	Category 1, Class B
vibration resistance for railway applications according to EN 61373	Category 1, Class B
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	10/01/2014
SVHC substance name	Lead monoxide (lead oxide) CAS-No. 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one CAS-No. 71868-10-5 Melamine CAS-No. 108-78-1 Diboron trioxide CAS-No. 1303-86-2
Net Weight	66 g
design of the device type	2 F-DI + 1 LED
AS-Interface device profile	S-7.B.F
ID1 code	0...F
number of AS-i devices	1
operating voltage rated value	26.5 ... 31.6 V
operating voltage 1 at DC rated value	30 V
Communication/ Protocol	
protocol is supported	
• AS-Interface protocol	Yes
• ASIsafe (Safety at work) protocol	Yes
Inputs/ Outputs	
number of digital inputs	
• safety-related	2
number of digital outputs	1; For controlling the LED
Connections/ Terminals	

type of electrical connection	Insulation displacement method		
Lamp			
color of the light source	red		
Product Function			
suitability for use safety-related circuits	Yes		
Safety related data			
product function suitable for safety function	Yes		
safe state	off		
test wear-related service life necessary	No		
category according to EN 954-1	4		
average diagnostic coverage level (DCavg)	99 %		
IEC 62061			
Safety Integrity Level (SIL) according to IEC 62061	SIL 3		
PFHD with high demand rate according to IEC 62061	4.5E-9 1/h		
ISO 13849			
performance level (PL) according to ISO 13849-1	PL e		
category according to ISO 13849-1	4		
device type according to ISO 13849-1	1		
IEC 61508			
Safety Integrity Level (SIL)			
• according to IEC 61508	SIL 3		
safety device type according to IEC 61508-2	Type B		
PFHD with high demand rate according to IEC 61508	4.5E-9 1/h		
PFDAvg with low demand rate according to IEC 61508	5E-6		
Safe failure fraction (SFF)	99 %		
hardware fault tolerance according to IEC 61508	1		
T1 value of service life according to IEC 61508	20 a		
Ambient conditions			
ambient temperature			
• during operation	-25 ... +70 °C		
• during storage	-40 ... +80 °C		
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted)		
Installation/ mounting/ dimensions			
fastening method			
• of modules and accessories	Front plate mounting		
• of the AS-i devices	Frontplattenbefestigung		
height	42 mm		
width	30 mm		
depth	66.9 mm		
Approvals Certificates			
Environmental Product Declaration			
• global warming potential [CO2 eq] / during manufacturing	0.566 kg		
• global warming potential [CO2 eq] / during operation	0.235 kg		
• global warming potential [CO2 eq] / after end of life	-0.0145 kg		
• global warming potential [CO2 eq] / total	0.787 kg		
Environment	General Product Approval		
Environmental Confirmations	    		
General Product Approval	EMV	Test Certificates	Maritime application



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Maritime application	other	Industrial Communication
----------------------	-------	--------------------------



[Confirmation](#)

[Confirmation](#)



Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1EE20-4AA0>

Cax online generator


<https://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1401-1EE20-4AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-1EE20-4AA0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

https://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1401-1EE20-4AA0&lang=en

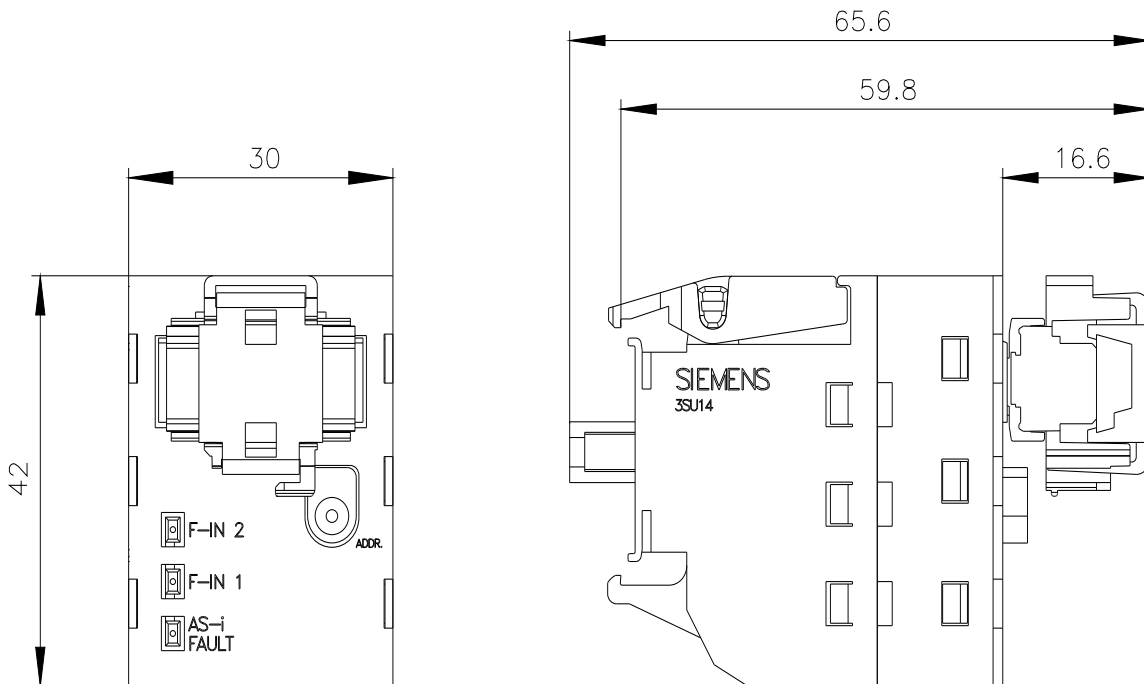

-K1

AS-i Bus:
Slave:



<input type="checkbox"/>	F-IN1	
<input type="checkbox"/>	F-IN2	
<input type="checkbox"/>	AS-i Fault Logic	

ASI+

ASI-

ADDR

last modified:

5/5/2026